

Karel FRYDRÝŠEK*, Horst GONDEK**

HARD ROCK DISINTEGRATION PROCESS AND ITS NUMERICAL SOLUTION

PROCES ROZPOJOVÁNÍ TVRDÝCH HORNIN A JEHO NUMERICKÉ ŘEŠENÍ

Abstract

This paper is focused on a numerical analysis of the hard rock (ore) disintegration process. There is discussed the possibility of using computational modelling for the mechanical contact problem between the hard rock and a cutting bit. The bit (i.e. an excavation tool with a flat frontal side and a conical edge) moves and sinks into the hard rock and subsequently disintegrates it. The whole problem of the hard rock disintegration process (i.e. stress-strain relationship, contact forces, reaction forces and fracture of the ore) is solved via Finite Element Method (MSC.MARC/MENTAT software). The rock disintegration process was solved via deactivation of finite elements which satisfy conditions of fracture. Some results (i.e. reaction forces in the cutting bit) are also compared with experiments.

Abstrakt

Článek je zaměřen na numerickou analýzu rozpojování tvrdých hornin (rud). Je rozebírán problém možností počítačového modelování problematiky mechanického kontaktu mezi tvrdou horninou a řezným nástrojem. Nůž (tj. rozpojovací nástroj s plochým čelem a kuželovým břitem) se pohybuje a vniká do tvrdé horniny a následně ji rozpojuje. Celá problematika rozpojování tvrdých hornin (tj. napěťově-deformační stav, kontaktní síly, reakční síly a lom rudy) je řešena pomocí MKP (MSC.MARC/MENTAT software). Proces rozpojování hornin je řešen pomocí deaktivace elementů, které splňují podmínky lomu. Některé výsledky (tj. reakční síly v řezném nástroji) jsou také porovnány s experimenty.

1 INTRODUCTION

Scientific and technical development, in all areas of the world-wide industry, is described by growing demand for basic resources of raw materials and energy. Provision of sufficient quantities of raw materials and energy for the processing industry is the main limiting factor of further development.

In this case, it is very important to understand the analysis of the ore disintegration process, which includes the analysis of a bit (i.e. excavation tool) used in mining operations. The main focus is dedicated to the modelling of the mechanical contact between the bit and the ore, see Fig.1 and references [1], [2], [3] and [5].



Fig. 1 Typical Example of Mechanical Interaction between Bits and Hard Rock (i.e. Ore Disintegration Process, Experimental Measurements).

* Associate Prof., MSc., Ph.D., ING-PAED IGIP, VSB – Technical University of Ostrava, Faculty of Mechanical Engineering, Department of Mechanics of Materials, 17. listopadu 15, Ostrava, tel. (+420) 59 732 4552, e-mail karel.frydrysek@vsb.cz

** Prof. MSc., DrSc., VSB – Technical University of Ostrava, Faculty of Mechanical Engineering, Department of Production Machines and Design, 17. listopadu 15, Ostrava, tel. (+420) 59 732 1208, e-mail horst.gondek@vsb.cz myemail@email.cz

Scientific and technical development provides new ways for the solution of the ore disintegration process. There is also a possibility of Finite Element Method (FEM) applications. Hence, FEM (i.e. MSC.MARC/MENTAT 2005r3 software, see references [2] and [5]) was used in solution of the ore disintegration process.

2 FINITE ELEMENT MODEL OF THE ORE DISINTEGRATION PROCESS

Figures 2 and 3 show the basic scheme of the solution via FEM. The FE mesh contains 37663 nodes and 71755 plane elements.

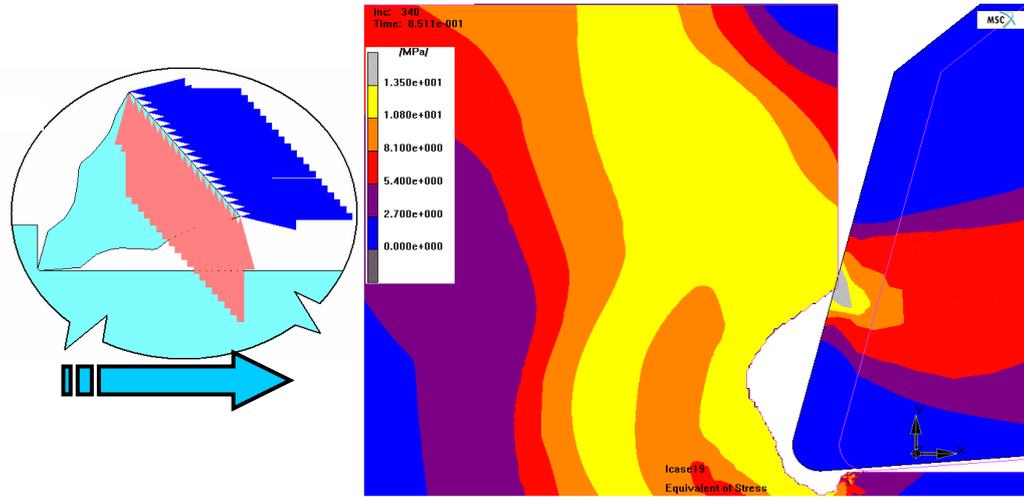


Fig. 2 Basic Scheme of the Ore Disintegration Process Solved via FEM Software MSC.MARC/MENTAT 2005r3.

The basic boundary conditions for plain strain formulation and loads are described in Fig.4, where u is the prescribed X-axis displacement and v is the prescribed Y-axis displacement. From Fig.4 it is evident that the bit is moving into the ore by the prescribed time dependent function $u = f(t)$, see arrows in Fig.4. There is a prescribed zero displacement on three edges of the modelled area, see arrows in Fig.4.

There is also a mechanical contact with Coulomb's friction between the bit and platinum ore, because the bit works through the ore and disintegrates it, see Fig.5.

Material properties (i.e. isotropic and homogeneous materials) of the whole system are illustrated in Fig.6, where E is Young's modulus of elasticity and μ is Poisson's ratio. Hence, the bit is made of sintered carbide (sharp edge) and steel. The ore material is elasto-plastic with a yield limit $R_p = 12$ MPa and fracture limit $R_m = 13.5$ MPa, see Fig.7.

37663 nodes
71775 elements

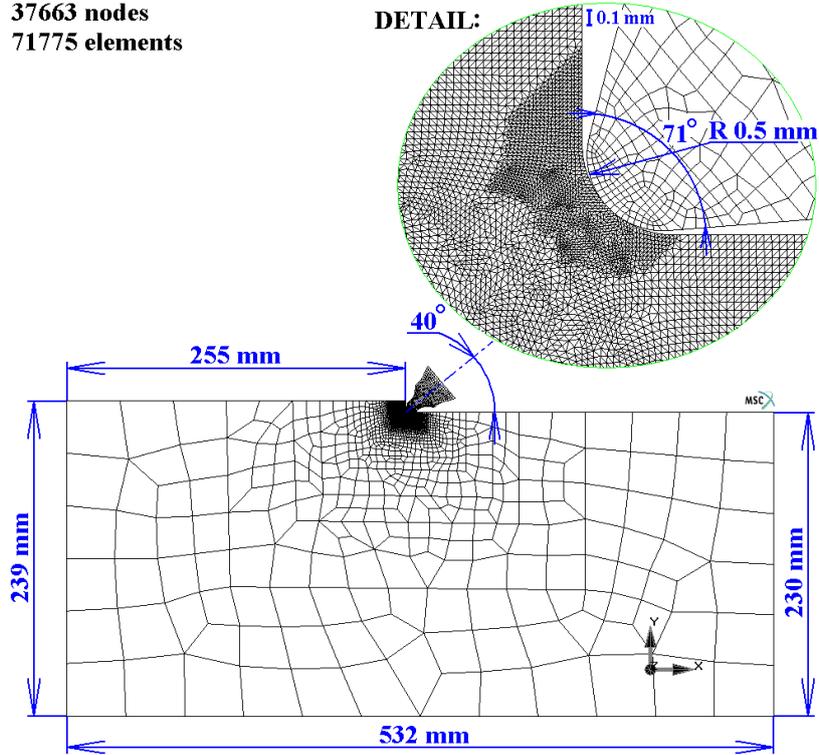


Fig. 3 Scheme and Geometry of the 2D FE Mesh Model and its Detail.

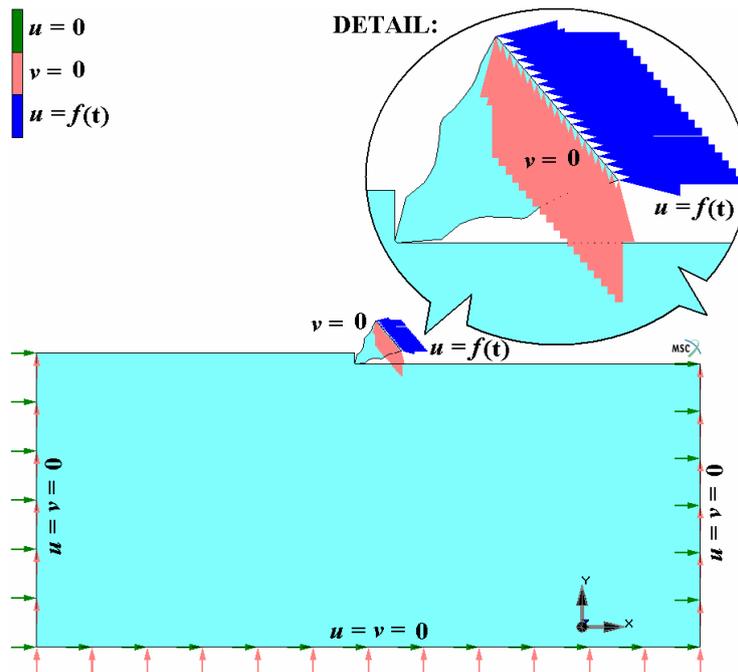


Fig. 4 Boundary Conditions Scheme of the 2D Model (Plane Strain Formulation).

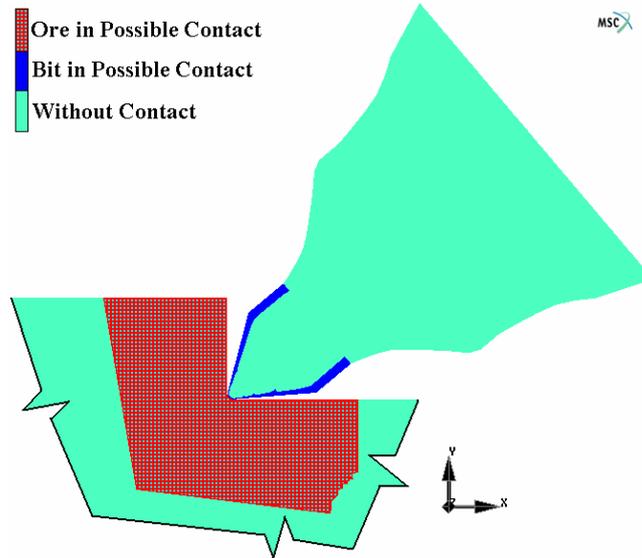


Fig. 5 Boundary Conditions (Mechanical Contacts).

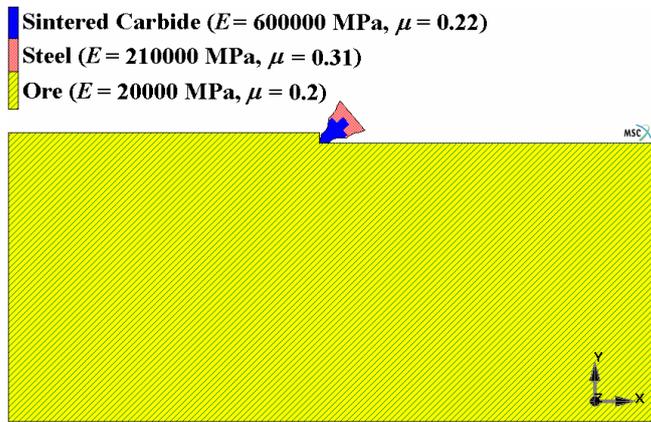


Fig. 6 Material Properties.

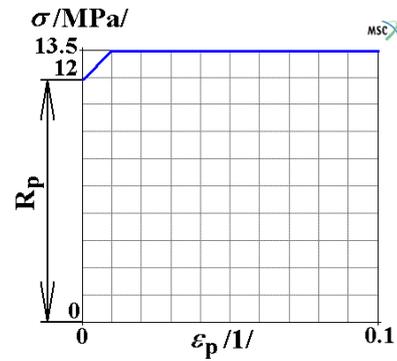


Fig. 7 Relationship between Stress and Plastic Strain for Ore.

When the bit is moving into the ore (i.e. a mechanical contact between the bit and the ore occurs) the stresses (i.e. equivalent von Mises stresses: $\sigma_{\text{HMH}} = \sqrt{\sigma_1^2 + \sigma_2^2 + \sigma_3^2 - \sigma_1\sigma_2 - \sigma_2\sigma_3 - \sigma_3\sigma_1}$ in the ore increases. When the situation $\sigma_{\text{HMH}} \geq R_m$ occurs (i.e. equivalent stress is greater than the fracture limit) in some elements of the ore, then these elements break off (i.e. these elements are dead). Hence, the disintegration of a part of the ore occurs. In the MSC.MARC/MENTAT software, it happens by deactivating the elements which satisfy condition $\sigma_{\text{HMH}} \geq R_m$. This deactivation of elements was checked and done in every 5th. step of the solution.

However, this FE model is primarily focused on the calculation of reaction forces in the bit. Hence, the quality of the calculated stress-strain states in the ore, caused by moving of the bit, has approximate character only.

3 NUMERICAL SOLUTIONS

Because of material non-linearities, the mechanical contacts with friction, the large number of elements and many iteration steps, four parallel computers (Linux OS, 4×CPU AMD Opteron 848 with 4 GB RAM memory, Domain Decomposition Method, FETI procedure), were used to solve the large computational needs of this problem, see Fig.8.

The whole time of the non-linear solution (i.e. 1.04 s) was divided into 370 steps of variable length. The Full Newton-Raphson Method was used for solving the non-linear problem.

4 RESULTS OF FEM

The following figures show equivalent stress (i.e. σ_{HMH} distributions) at some chosen time t of the solution. Hence:

- Fig.9 - $t=0$ s, i.e. start of the solution,
- Fig.10 - $t=1.639 \times 10^{-2}$ s,
- Fig.11 - $t=3.37 \times 10^{-2}$ s,
- Fig.12 - $t=8.047 \times 10^{-1}$ s,
- Fig.13 - $t=1.928 \times 10^{-1}$ s,
- Fig.14 - $t=2.388 \times 10^{-1}$ s,
- Fig.15 - $t=3.714 \times 10^{-1}$ s,
- Fig.16 - $t=5.796 \times 10^{-1}$ s,
- Fig.17 - $t=8.335 \times 10^{-1}$ s,
- Fig.18 - $t=8.511 \times 10^{-1}$ s and
- Fig.19 - $t=1.026 \times 10^{-1}$ s.

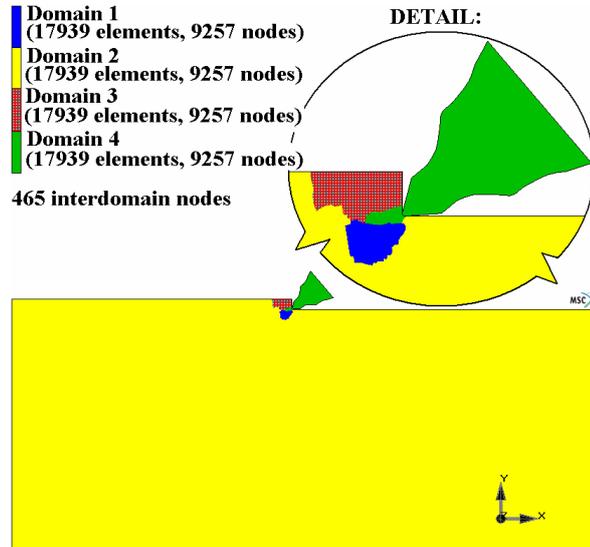


Fig. 8 Domain Decomposition Method Applied for 4×CPU.

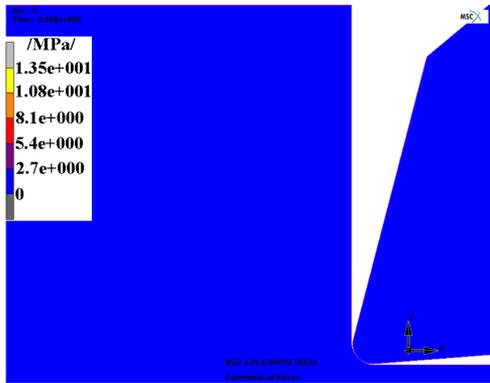


Fig. 9 - $t=0$ s (Start of the Solution).

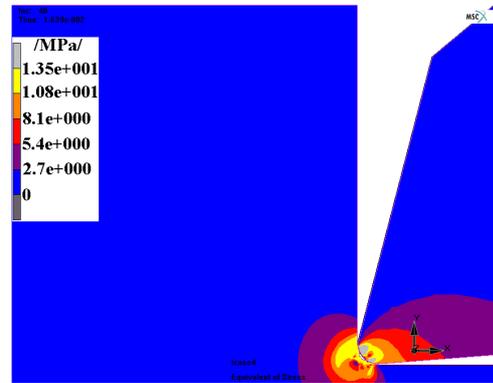


Fig. 10 - $t=0.01639$ s.

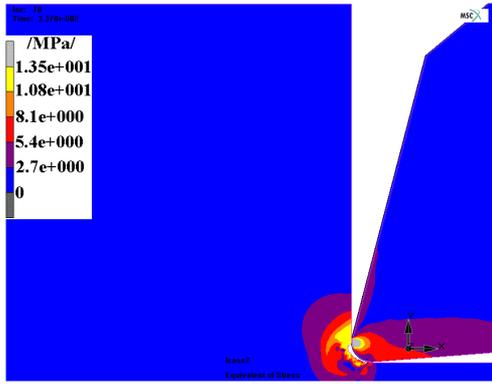


Fig. 11 - $t = 0.0337$ s.

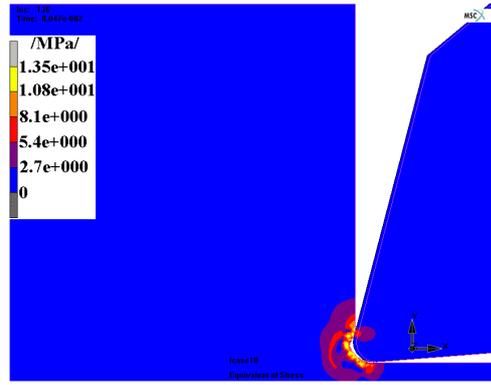


Fig. 12 - $t = 0.08047$ s.

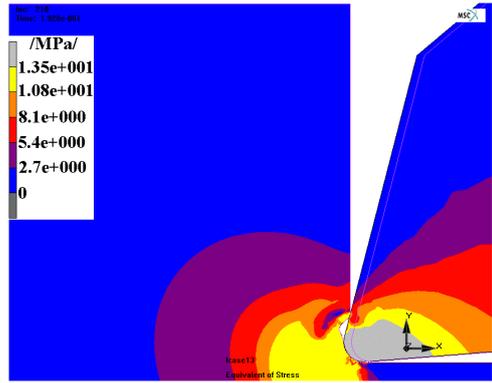


Fig. 13 - $t = 0.1928$ s.

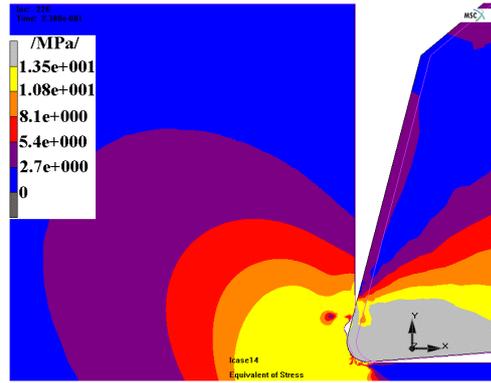


Fig. 14 - $t = 0.2388$ s.

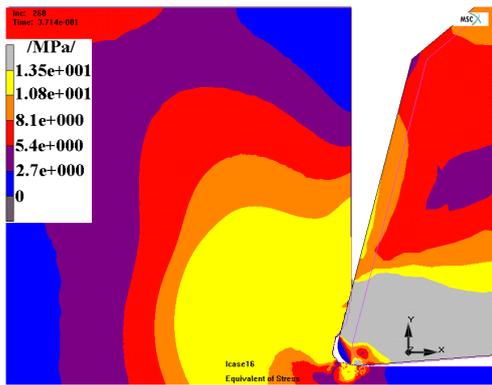


Fig. 15 - $t = 0.3714$ s.

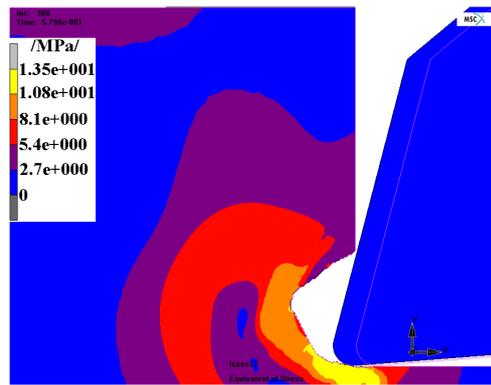


Fig. 16 - $t = 0.5796$ s.

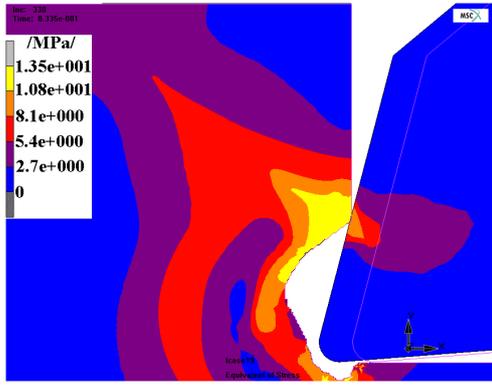


Fig.17 - t = 0.8335 s.

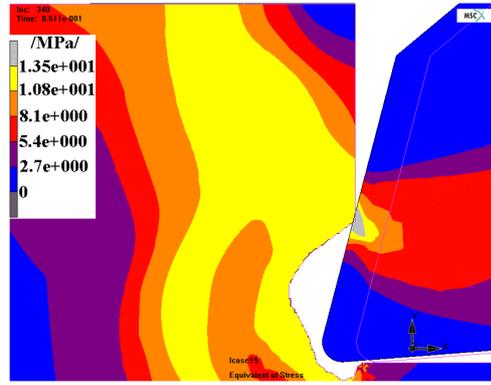


Fig.18 - t = 0.8511 s.

In Figures 9 to 19, the moving of the bit is evident and also the subsequent disintegration of the ore caused by the cutting bit.

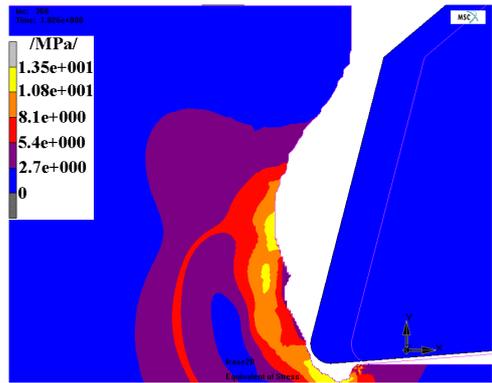


Fig. 19 - t = 1.026 s.

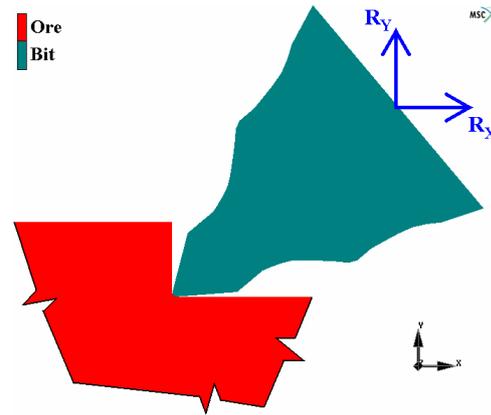


Fig. 20 Reaction Forces in the Bit.

From the results of FEM the reaction forces R_x , R_y and total reaction force $R = \sqrt{R_x^2 + R_y^2}$ acting in the bit, can be calculated, see Figs. 20 and 21. The maximum reaction force (acquired by FEM) is $R_{MAX_{FEM}} = 4598 \text{ N}$.

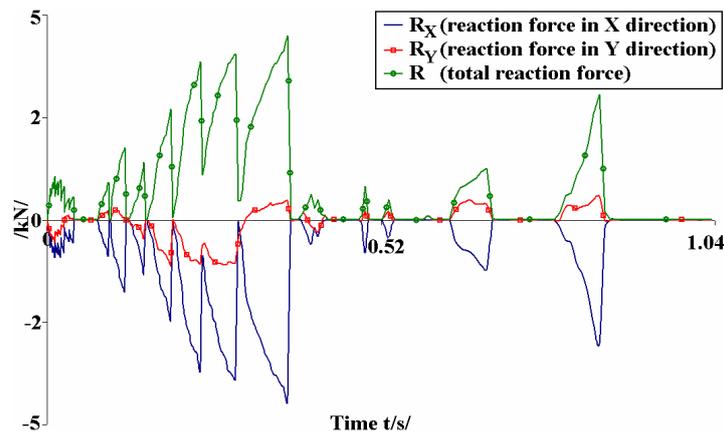


Fig. 21 Reaction Forces in the Bit.

5 COMPARISON OF FEM RESULTS WITH EXPERIMENTAL MEASUREMENTS

The calculated forces (i.e. FEM solution, see Fig.21) can be compared with the experimental measurements (i.e. compared with the part of Fig.22, i.e. the record of reaction forces).

From the evaluation of experiments it is evident that the maximum force is $R_{MAX_EXP} = 5280 \text{ N}$. Hence, the relative error is:

$$\Delta_{R_{MAX}} = 100 \times \frac{R_{MAX_EXP} - R_{MAX_FEM}}{R_{MAX_EXP}} = 12.9 \% \quad (1)$$

The error of 12.9% is caused by the chosen 2D FE model (i.e. plane strain formulation) which is sometime a pure (but simple) approximation of real 3D situation. However, the experiments also have a large variability of inputs caused by anisotropic and stochastic properties of the material and by the large variability of reaction forces, for example see Fig.22.

6 CONCLUSIONS

The error of the FEM result (i.e. comparing with experiments, see eq. (1)) is acceptable. Hence, FEM can be useful tool for the solution of the ore disintegration process. All results were applied to an optimization and a new design of the bit.

The whole disintegration process (i.e. the bit moves and sinks into the ore) was solved in a new and modern way (i.e. by deactivating the elements which satisfy condition of fracture).

In the future 3D FE models (instead of 2D plane strain formulation) will be applied, which can be more accurate.

Since the material of the ore (i.e. yield limit, fracture limit, Young's modulus, Poisson's ratio etc.) has large variability, the stochastic theory and theory of probability can be applied. Hence, in the future, the whole presented problem can be solved via Simulation-Based Reliability Assessment (SBRA) Method, see references [4] to [6]. The SBRA Method, which is based on Monte Carlo simulations, can include all stochastic (real) inputs and then all results are also of a stochastic (real) quantity.

The work has been supported by the Czech project GAČR 103/07/0557 (Probabilistic Engineering Reliability Assessment of Structures).

REFERENCES

- [1] *Collection of Documents of Long Airdox Company.*
- [2] VALÍČEK, P. *Řešení problematiky rozpojovacích orgánů pro stroje na dobývání platinové rudy*, (Ph.D. Thesis), FS VŠB-TU Ostrava, Ostrava, 2007, Czech Republic, pp. 76. (in Czech)
- [3] ZUBRZYCKI, J., JONAK, J.: *Numeryczno-eksperymentalne badania wplywu kstaltu powierzchni natarcia ostrza na obciążenie noża skrawającego naturalny materiał kruchy*, Lubelskie Towarzystwo Naukowe, Lublin 2003, ISBN 83-87833-42-8 (in Polish).

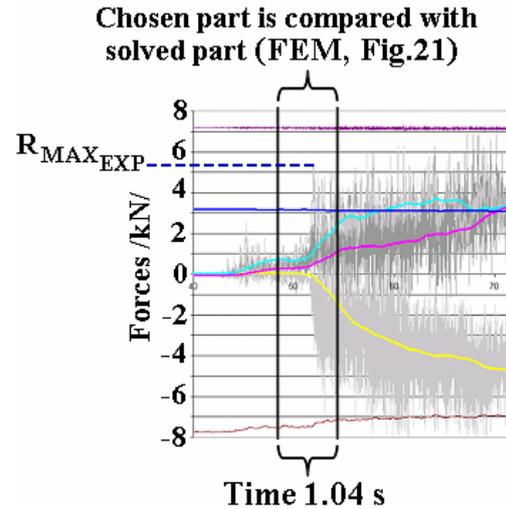


Fig. 22 Experimental Measurements (Forces and Other Acquired Quantities) and its Comparison with the FE Solution.

- [4] MAREK, P., BROZZETTI, J., GUŠTAR, M., TIKALSKY P. *Probabilistic Assessment of Structures Using Monte Carlo Simulation Background, Exercises and Software, (2nd extended edition)*, ISBN 80-86246-19-1, ITAM CAS, Prague, Czech Republic, 2003, pp.471.
- [5] FRYDRÝŠEK, K. *Application of Probabilistic SBRA Method in the Scientific and Technical Practice*, (written in Czech language), inaugural dissertation in the branch of Applied Mechanics, Department of Mechanics of Materials, FME VŠB-TU Ostrava, Ostrava, CZ, pp.144, 2009.
- [6] FRYDRÝŠEK, K. *Stochastic Solution and Evaluation of the Ore Disintegration Process*, In: Proceedings of the 2009 International Conference on Scientific Computing CSC2009, ISBN: 1-60132-098-1, CSREA Press, Las Vegas, USA, 2009, pp.40-46.

